


Latency:

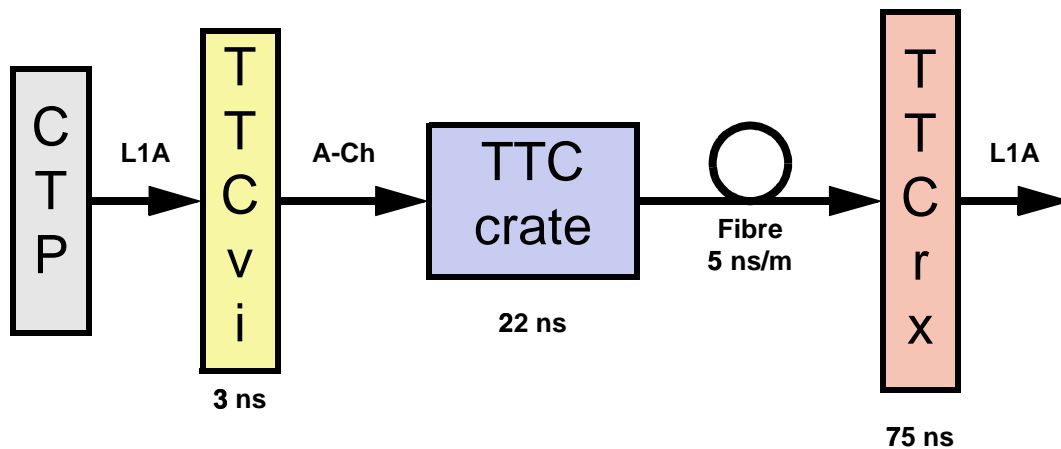

Element	Delay	Remark
TTCvi	3 ns	3 ECL stages
TTCvi to TTC crate	3 ns	Cable
TTC crate	22 ns	Modulator, etc....
TTCrx	75 ns	Receiver
Total delay excluding cables and fibres	103 ns	TTCvi + TTC crate + TTCrx

To which sub-systems must add:

Element	Remark
CTP to TTCvi	Depends on where TTC is
TTC crate to destination	- TTC crate to Front-end - TTC crate to ROD crate + ROD crate to Front-end
Change of protocol	If any