

## The ECL Translator Guide

PECL • LVPECL • NECL • TTL •  
LVTTL/LVCMOS • CMOS

Prepared by: Paul Shockman  
ON Semiconductor Logic Applications Engineering



ON Semiconductor®

<http://onsemi.com>

### Objective

This application note is intended to provide the basic device selection and connection information to enable signal translation interface between ON Semiconductor's ECL logic operating in various supply modes. This document also provides information regarding translation between our ECL devices and TTL (5 V), CMOS (5 V), or LVTTL/LVCMOS (3.3 V) devices. For translation interface with LVDS, see AN1568.

Translation to and from ECL technology is discussed in three divisions:

### Section 1. Translation between differently supplied ECL drivers and receivers

### Section 2. Translation from different ECL operating mode drivers to non ECL receivers

### Section 3. Translation from non ECL drivers to different ECL operating mode receivers

Proper translation occurs when the driver's output logic levels are within the spec limits of the receiver and are recognized. Specific device Data Sheets should be consulted for exact specifications and parameter limits.

### Resources

IBIS and SPICE models may be found at [www.onsemi.com](http://www.onsemi.com) for most devices. General ECL information, also online, may be consulted such as AND8020, AND8066, and AND8072.

### General Background

TTL and CMOS drivers generally source current (to the receiver) in the HIGH state and sink current (from the receiver) in the LOW state. In contrast, ECL drivers source current in both HIGH and LOW states (to the receiver). Receiver inputs do not require any "termination" although any driver may or may not require termination considerations. The driver termination considerations may be located physically near or internal to a receiver.

TTL and CMOS devices will usually be operated across a single positive power supply ( $V_{CC}$  or  $V_{DD}$ ) and ground. ECL devices may operate similarly across a single Positive supply and  $V_{EE}$  (Ground) as Positive ECL (PECL) or Low Voltage Positive ECL (LVPECL). Or traditionally, ECL devices may span across Ground and a single negative

## APPLICATION NOTE

power supply,  $V_{EE}$ , as Negative ECL (NECL) or Low Voltage Negative ECL (LVNECL). Any device may be operated with all pins offset by a fixed voltage, but interface with standard levels may require a translation device. A pure ECL device might be operated in NECL, PECL, or LVPECL mode by simply shifting all voltage levels. Of course, a translator dedicated to a specific technology will expect only fixed voltages and can't usually operate in different, or shifted voltage modes.

Different ECL operating supply modes are generally considered to be as presented below in Table 1: ECL Operating Supply Modes.

Table 1. ECL Operating Supply Modes

PECL	$V_{CC} = 5.0, V_{EE} = 0.0$
LVPECL	$V_{CC} = 3.3, V_{EE} = 0.0$
2.5VPECL	$V_{CC} = 2.5, V_{EE} = 0.0$
2.5VNECL	$V_{CC} = 0.0, V_{EE} = -2.5$
LVNECL	$V_{CC} = 0.0, V_{EE} = -3.3$
NECL	$V_{CC} = 0.0, V_{EE} = -5.0$

Some devices may span one or more operating modes and each mode will allow supply tolerances. ECL signal levels ( $V_{OL}$ ,  $V_{OH}$ ,  $V_{IL}$ , and  $V_{IH}$ ) are referenced from the  $V_{CC}$  pin or positive rail. Therefore, when ECL devices are operated from different negative power supplies, no translation is required for interconnects. When operated in a single ended configuration, the critical Input parameters are  $V_{IL}$  and  $V_{IH}$  limits ( $V_{IHCMR}$  and  $V_{pp}$  are ignored). When operation differentially, critical limit Input parameters are  $V_{IHCMR}$  and  $V_{pp}$  ( $V_{IL}$  and  $V_{IH}$  are ignored). See AND8066 for interconnect details. All supply pins,  $V_{CC}$ ,  $LV_{CC}$ , and GND, must be connected for proper operation. A 0.1 to 0.01  $\mu F$  decoupling cap is recommended from  $V_{CC}$  to GND.  $V_{CC}$  ripple should be minimized and may require additional filter networks.

Standard non ECL operating modes are generally considered (with certain supply tolerances) to be as presented below in Table 2: Non ECL Operating Supply Modes.

Table 2. Non ECL Operating Supply Modes

$V_{CC} = 5.0, V_{EE} = 0.0$
$V_{CC} = 3.3, V_{EE} = 0.0$
$V_{CC} = 2.5, V_{EE} = 0.0$

Most translation interface between technologies will require a separate, dedicated translator IC device, but some newer ECL devices offer a translation feature integrated into certain mode control pins. Several of the GigaComm™ devices offer a programmable mode pins for selecting the control pins translation levels. MC10EP195 offers Delay Select pins with user programmable TTL, CMOS, or ECL threshold levels.

An alternative translation technique, cap coupling, is discussed in another Application Note AND8020, section 5. Cap coupling may accommodate level shifting when the signal's "edge density" is sufficient. Otherwise, coding may be required to increase "edge density". Certainly the risk of erroneous levels, due to the coupling cap leakage, may not be acceptable and system requirements may demand the hard levels found with active device translation.

## Section 1. Translation between differently supplied ECL drivers and receivers

The table entry "Standard connection" indicates no translation is needed.

From:	To:	PECL $V_{CC} = +5\text{ V}$	LVPECL $V_{CC} = +3.3\text{ V}$	LVNECL $V_{EE} = -3.3\text{ V}$	NECL $V_{EE} = -4.5\text{ to }-5.2\text{ V}$
PECL $V_{CC} = +5\text{ V}$		Standard Connection	LVEL92	LVEL91	EL91
LVPECL $V_{CC} = +3.3\text{ V}$		EL17 EP17 LVEL16 LVEL17	Direct Connection	LVEL91	EL91
LVNECL $V_{EE} = -3.3\text{ V}$		EL90	LVEL90	Standard Connection	Direct Connection
NECL $V_{EE} = -4.5\text{ V to }-5.2\text{ V}$		EL90	LVEL90	Standard Connection	Standard Connection

### From PECL to LVPECL

The MC100LVEL92 translates signals from a PECL ( $V_{CC} = 5.0$ ,  $V_{EE} = 0.0$ ) operating mode driver to a LVPECL ( $V_{CC} = 3.3$ ,  $V_{EE} = 0.0$ ) operating mode receiver.

### From PECL to NECL

The MC100EL91 translates signals from a PECL ( $V_{CC} = 5.0$ ,  $V_{EE} = 0.0$ ) operating mode driver to a NECL ( $V_{CC} = 0.0$ ,  $V_{EE} = -5.0$ ) operating mode receiver.

### From PECL to LVNECL

The MC100LVEL91 translates signals from a PECL ( $V_{CC} = 5.0$ ,  $V_{EE} = 0.0$ ) operating mode driver to a LVNECL ( $V_{CC} = 0.0$ ,  $V_{EE} = -3.3$ ) operating mode receiver.

### From LVPECL to PECL

The critical parameter for differential PECL receiver to properly interface with a differential LVPECL driver is  $V_{IHCMRmin}$  (or  $V_{CMRmin}$ ).  $V_{IH}$  and  $V_{IL}$  limits may be disregarded for differential receiving. Assuming no tangent loss from traces, if the LVPECL driver  $V_{OHmin}$  level is more positive (higher) than the  $V_{IHCMRmin}$  spec of the differential PECL receiver, the device will properly translate or level shift from LVPECL to PECL. For example, suppose a MC100EP16 operating differentially in LVPECL mode ( $V_{CC} = 3.3$ ,  $V_{EE} = 0.0$ ) with a worst case  $V_{OHmin}$  of 2.155 V, drives a MC100EP17 receiver differentially operating in PECL mode ( $V_{CC} = 5.0$ ,  $V_{EE} = 0.0$ ). The MC100EP17 receiver spec  $V_{IHCMRmin}$  is 2.0 V and will always properly recognize the drivers HIGH level 2.155 V (or higher). The

MC100EL13, MC100EL14, MC100EL29, MC100EL56 are also acceptable as LVPECL receivers differentially.

Most of the "E" (ECLinPS), "EL" (ECLinPS Lite), 10H/100H, or 10xxx series devices do not have a sufficiently low  $V_{IHCMRmin}$  to receive LVPECL.

When a receiver in LVPECL mode is driven single ended, the critical parameters will be  $V_{IL}$  and  $V_{IH}$ .  $V_{IHCMRmin}$  (or  $V_{CMRmin}$ ) may be ignored. A PECL receiver  $V_{ILmin}$ , typically  $>3.0\text{ V}$ , will be insufficiently low to recognize the drivers HIGH level and will not permit proper interconnect.

### From LVPECL to LVNECL

The MC100LVEL91 translates signals from a PECL ( $V_{CC} = 5.0$ ,  $V_{EE} = 0.0$ ) operating mode driver to a LVNECL ( $V_{CC} = 0.0$ ,  $V_{EE} = -3.3$ ) operating mode receiver.

### From LVPECL to NECL

The MC100EL91 translates signals from a LVPECL ( $V_{CC} = 3.3$ ,  $V_{EE} = 0.0$ ) operating mode driver to a NECL ( $V_{CC} = 0.0$ ,  $V_{EE} = -5.0$ ) operating mode receiver.

### From LVNECL to PECL

The MC100EL90 translates signals from a LVNECL ( $V_{CC} = 0.0$ ,  $V_{EE} = -3.3$ ) operating mode driver to a PECL ( $V_{CC} = 5.0$ ,  $V_{EE} = 0.0$ ) operating mode receiver.

### From LVNECL to LVPECL

The MC100LVEL90 translates signals from a LVNECL ( $V_{CC} = 0.0$ ,  $V_{EE} = -3.3$ ) operating mode driver to a PECL ( $V_{CC} = 3.3$ ,  $V_{EE} = 0.0$ ) operating mode receiver.

## Section 2. Translation from different ECL operating mode drivers to non ECL receivers

From:	To:	TTL $V_{CC} = +5\text{ V}$	LVTTTL/LVCMOS $V_{CC} = 3.3\text{ V}$	CMOS $V_{DD} = 5\text{ V}$
<b>PECL</b> $V_{CC} = +5\text{ V}$		H350 H607 ELT21 ELT23 ELT28*	LVEL92 + LVELT23 or EPT21 or EPT23 or LVELT23 or EPT26	PECL to TTL or PECL to LVTTTL/LVCMOS Translator and HCT or ACT
<b>LVPECL</b> $V_{CC} = +3.3\text{ V}$		ELT21 ELT23	EPT21 EPT23 LVELT23 EPT26	LVPECL to LVTTTL Translator and HCT or ACT input
<b>LVNECL</b> $V_{EE} = -3.3\text{ V}$		ELT25 EPT25*	EPT25	LVNECL/TTL Translator to HCT or ACT input
<b>NECL</b> $V_{EE} = -4.5\text{ to }-5.2\text{ V}$		H125 H601 H603 H605 H680* H681* ELT25 EPT25*	EPT25	NECL/TTL Translator to HCT or ACT input

\*See text segment for details

## From PECL to TTL

MC10H350 as PECL to TTL

Several devices are offered for translation signals from PECL mode drivers to 5 V supplied TTL receivers. The MC10H350 operates over the frequency range from DC to about 50 MHz. Although operation is possible to 80 MHz, the output will not sustain full spec  $V_{OH}$  levels rolling off with higher frequency.

Open, floating differential inputs on a gate will force the TTL output to default LOW. By adding a pull-up resistor of 1 to 4 k $\Omega$ , a device's output will directly interface with CMOS (5 V) inputs. The device input pin "common mode range",  $V_{IHCMR}$  min to max, is insufficient to allow recognition of LVPECL levels. Single ended operation of the MC10H350 will require an input signal swing of 700 mV peak-to-peak or greater.

Outputs are Enabled by pin 9,  $\overline{OE}$ , going LOW. If left floating open, MC10H350 pin 9 will default LOW. Worst case skew from Output to Output within a device occurs from Input falling edge to Output falling edge at 125°C at 1.4 ns. For the Input rising edge to Output rising edge, the worst case skew is about 1 ns (at -55°C). Device to Device slew is less than 800 pS skew from part to part. Output drive will come out of saturation with 80-100 mA, lowering  $V_{OH}$  levels.

MC10H607 / MC100H607 as PECL to TTL

The MC10H607 and MC100H607 are Registered PECL to TTL translators. A standard output test condition load is

50 pF and 500 Ohms to GND. MR, pin 19, will default LOW when floating open, allowing operation. The input pin "common mode" range is insufficient to allow recognition of LVPECL levels.

ELT21/23/28 as PECL to TTL


ECL inputs for ELT21/23/28 have 50 k $\Omega$  internal pulldown resistors. If both ECL ELT21/23 inputs are pulled below 1.3 V, an override circuit will force the output Q to HIGH, Qb LOW. By adding an output pull-up resistor of 1 to 4 k $\Omega$ , a device will interface with CMOS (5 V) inputs. The input common mode range for ELT21 / ELT23 is generally considered to be sufficient (2.2 V) to allow recognition of PECL HIGH levels (>4 V) allowing translation. Single ended operation may be accomplished with a  $V_{BB}$  reference voltage placed on the non-driven differential input. If a  $V_{BB}$  pin is present, then it should be bypassed when used or left floating open when unused. A simple  $V_{BB}$  supply may be created by a resistor divider providing the proper switch point voltage to preserve duty cycle (see AND8066). A High Current may be created from a simple buffer gate as shown in AND8020, Figure 22.

These ELT TTL devices typically display >2X the required data sheet drive. For example, at  $V_{OLmax}$  (0.5 V) the required sinking drive current is 24 mA and actual drive >>50 mA. At  $V_{OHmin}$  (2.4 V), the spec sourcing drive current is 3.0 mA and the typical device will source >>8 mA. The unloaded  $V_{OH}$  max may reach as positive as 4.0 V.

Typical drive current strength of the TTL output is shown in the following two tables, “Table 3: ELT TTL Series Drive LOW Current ( $I_{OL}$ ) vs Voltage ( $V_{OL}$ )” and “Table 4: ELT Series TTL Drive HIGH Current ( $I_{OH}$ ) vs Voltage ( $V_{OH}$ )” and their graphs.

**Table 3. ELT TTL Series Drive LOW Current ( $I_{OL}$ ) vs Voltage ( $V_{OL}$ )**


$I_{OL}$	$V_{OL}$
0.010	0.162
0.020	0.209
0.030	0.256
0.040	0.303
0.079	0.465
0.118	0.628

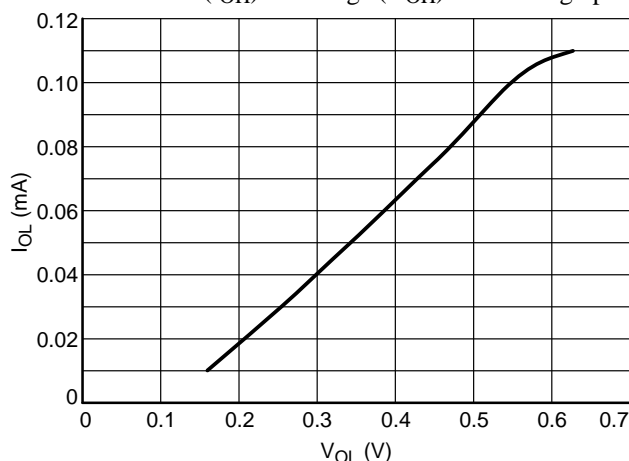

**Figure 1. ELT TTL Series Drive LOW Current ( $I_{OL}$ ) versus Voltage ( $V_{OL}$ )**

**Table 4. ELT Series TTL Drive HIGH Current ( $I_{OH}$ ) vs Voltage ( $V_{OH}$ )**

$I_{OH}$	$V_{OH}$
-0.0379	2
-0.0316	2.26
-0.0249	2.508
-0.0164	2.9
-0.0091	3.167
-0.0031	3.339
-0.001	3.4

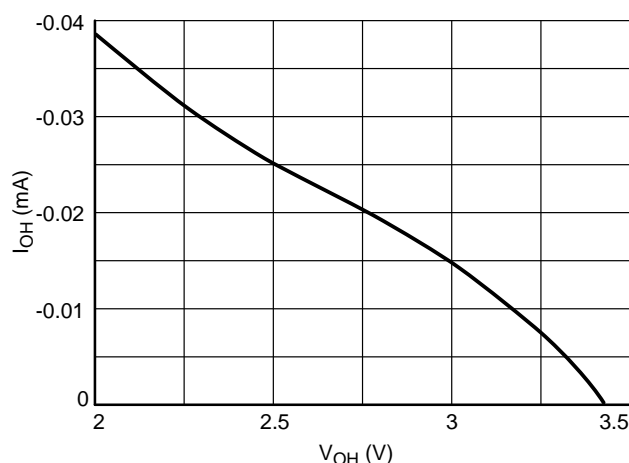

**Figure 2. ELT Series TTL Drive HIGH Current ( $I_{OH}$ ) versus Voltage ( $V_{OL}$ )**

Typical ELT TTL series output impedance in the HIGH state is about 43  $\Omega$ . In the LOW state output impedance is about 42  $\Omega$ .

Typical  $t_{pLH}$  and  $t_{pHL}$  may differ as much as 0.5 nS. At higher frequencies, the output swing will decrease. Gain is typically about five and inputs require a minimum of 200 mVpp swing. Jitter is typically 500 pS. Measurements are made at 1.5 V for AC characteristics such as  $t_{pd}$  and skew.

#### From PECL to LVTTTL

This translation requires two devices for a direct, active connection. First, a level shift from PECL to LVPECL is done with the MC100LVEL92. Then, a translation from LVPECL to LVTTTL is done with either the LVELT23, EPT21, EPT23, LVELT23, or EPT26 (see segment below).

No sequencing is needed in powering up the MC100LVEL92, although both Positive supply levels,  $V_{CC}$  and  $LV_{CC}$ , must be connected for proper operation.

#### From PECL to CMOS

The translation from PECL to CMOS is accomplished through two stages, from PECL to an intermediary stage (such as either TTL or LVTTTL), then from the intermediary stage to CMOS. When the intermediary stage is through TTL, then the final stage will be from TTL to CMOS using any of the HCT type devices (i.e., MC74HCT245A), or ACT (i.e., MC74ACT244).

#### From LVPECL to TTL

Translation from LVPECL to TTL will be similar to “PECL to LVTTTL” and the prior segment should be reviewed. The input common mode range maximum (2.2 V) for ELT21 / ELT23 is generally considered to be sufficient to allow recognition of LVPECL HIGH levels (>2.2 V), thus allowing proper translation.

### From LVPECL to LVTTTL/LVCMOS

Devices MC100EPT21, MC100EPT23, MC100LVELT23, and MC100EPT26 translate LVPECL signals to LVTTTL/LVCMOS. Standard levels for the LVTTTL and LVCMOS are the same.

There are no “open input” default circuits to force the outputs to a determined state. Provisions should be taken to prevent auto-oscillation. If the inputs are permitted to converged on the same voltage (within the  $V_{IHCMR}$  range), or merely left floating, auto-oscillation will initiate.

There are no power-up sequence requirements or power sequence restrictions. If either  $V_{CC}$  or  $V_{EE}$  supplies are not


present, such as during an open pin condition, the output falls to near zero without harm or damage to the device.

Outputs of these devices typically display about 2X the required data sheet drive. For example, at  $V_{OLmin}$  the drive is required to sink 24 mA and will typically sink >50 mA. At  $V_{OH}$ , the spec drive is -3.0 mA and will typically source >8 mA.

Typical drive current strength of the TTL output is shown in the following two tables, “Table 5: EPT TTL Series Drive LOW Current ( $I_{OL}$ ) vs Voltage ( $V_{OL}$ )” and “Table 6: EPT Series TTL Drive HIGH Current ( $I_{OH}$ ) vs Voltage ( $V_{OH}$ )” and their graphs.

**Table 5. EPT TTL Series Drive LOW Current ( $I_{OL}$ ) vs Voltage ( $V_{OL}$ ) at 25°C**


$I_{out}$	$V_{out}$
0.004	0.022
0.020	0.104
0.039	0.200
0.058	0.295
0.082	0.415
0.118	0.596
0.158	0.800
0.1963	1.000

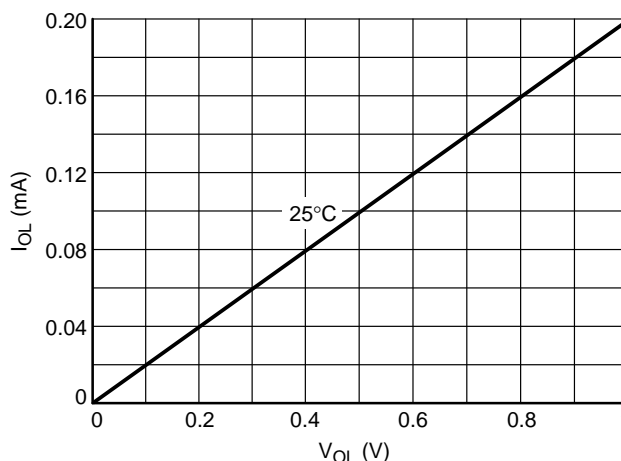

**Figure 3. EPT TTL Series Drive LOW Current ( $I_{OL}$ ) versus Voltage ( $V_{OL}$ ) at 25°C**

**Table 6. EPT Series TTL Drive HIGH Current ( $I_{OH}$ ) vs Voltage ( $V_{OH}$ ) at 25°C**

$I_{out}$	$V_{out}$
-0.0146	2.32
-0.0112	2.36
-0.0081	2.40
-0.0052	2.44
-0.0028	2.48
-0.0011	2.52
-0.0003	2.56

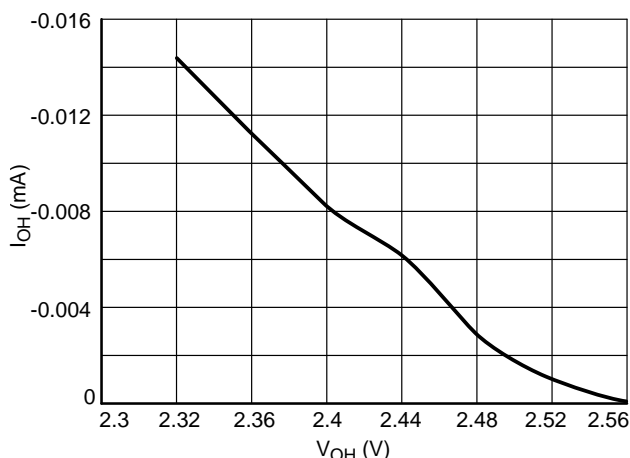

**Figure 4. EPT Series TTL Drive HIGH Current ( $I_{OH}$ ) versus Voltage ( $V_{OH}$ )**

Typical EPT TTL series output impedance in the HIGH state is about 5  $\Omega$ . In the LOW state output impedance is about 15  $\Omega$ .

AC measurements are made to the 1.5 V point for the AC characteristics such as  $t_{pd}$  and skew.

### From LVPECL to CMOS

Translation from LVPECL to CMOS will be similar to “PECL to CMOS” and that prior segment should be

reviewed. The receiver input common mode range maximum must be sufficient to allow proper recognition of LVPECL HIGH levels (>2.2 V), thus allowing proper translation.

The LVPECL to CMOS translation is accomplished through two stages, first LVPECL to LVTTTL, then from LVTTTL to CMOS. Final stage devices may any of the HCT

type devices (i.e., MC74HCT245A), or ACT (i.e., MC74ACT244).

#### From LVNECL to TTL

MC100ELT25 will translate from LVNECL to TTL. Note the  $V_{IHCMR}$  minimum is  $V_{EE} + 2.2$  V. If a 3.3 V supply is available for the MC100EPT25, this device will translate LVNECL to TTL, reaching a  $V_{OH}$  of greater than 2.4 V up to 250 MHz.

#### From LVNECL to LVTTTL/LVCMOS

MC100EPT25 will translate from LVNECL to LVTTTL/LVCMOS.

#### From LVNECL to CMOS

Use a first stage of MC100ELT25 (or MC100EPT23 if a 3.3 V supply is available) and then use a final stage device of an appropriate HCT (i.e., MC74HCT245A) or ACT (i.e., MC74ACT244).

#### From NECL to TTL

Several devices are offered for translation signals from NECL mode drivers to 5 V supplied TTL receivers, but the MC10H125 is the standard translator. Special advantages may be realized with the MC10H6xx series devices. Review the device data sheets for specific devices features.

The MC10H125 operates over the frequency range from DC to about 50 MHz, although operation is possible

>80 MHz with diminished output swing (reduced  $V_{OH}$  levels) with higher frequency. Open, floating differential inputs on a gate may allow the device to spontaneously auto oscillate unless provisions are taken to prevent the inputs from converging. An external network may be used to force a default state on the outputs when the inputs are open. Use a 50 k $\Omega$  pulldown on the non-inverting input, then a 50 k $\Omega$  pull-up and a 50 k $\Omega$  pulldown on the inverting input.

If a 3.3 V  $V_{CC}$  is available, the MC100EPT25 may be used on this supply to receive NECL and drive a TTL receiver. The MC100EPT25  $V_{OH}$  will be limited to about 2.6 V at lower frequencies, decreasing at higher frequencies to 1.6 V  $V_{OH}$ , at 550 MHz (see data sheet). These may be sufficient levels for a TTL receiver.

#### From NECL to LVTTTL/LVCMOS

MC100EPT25 will translate from NECL to LVTTTL/LVCMOS.

#### From NECL to CMOS

Use a MC100EPT25 to translate from NECL to LVTTTL/LVCMOS, and then any of the HCT type devices (i.e., MC74HCT245A), or ACT (i.e., MC74ACT244) to boost the levels to CMOS.

### Section 3. Translation from non ECL drivers to different ECL operating mode receivers

From:	To:	PECL $V_{CC} = +5$ V	LVPECL $V_{CC} = +3.3$ V	LVNECL $V_{EE} = -3.3$ V	NECL $V_{EE} = -4.5$ to $-5.2$ V
TTL		H351 H606 ELT20 ELT22 ELT28*	ELT20, or ELT22, + LVEL92; if $V_{IH}$ is limited to $V_{CC} = 3.3$ V use EPT20, EPT22, or LVELT22	ELT20 or ELT22 + LVEL91	H424 H124 H600 H602 H604 ELT24
LVTTTL/LVCMOS $V_{CC} = 3.3$ V		H351 H606 ELT20 ELT22 ELT28* OR: (EPT20 or EPT22 or EP24 or LVELT22) + 5 V PECL line receiver	EPT20 EPT22 LVELT22	EPT24 + LVEL91	EPT24 + EL91
CMOS $V_{DD} = +5$ V		H352 ELT20 ELT22 ELT28	H352 + LVEL92	H352 + LVEL91	H352 + EL91

\*Bidirectional

## From TTL to PECL

An open, floating TTL input will drift to near  $V_{CC}$  and may inject noise into the device under this condition. It is recommended to tie any unused TTL input to  $V_{CC}$ .

### MC10H351 as TTL to PECL

The MC10H351 operates over the frequency range from DC to >200 MHz. Although operation to higher frequencies is possible, the output  $V_{OH}$  levels will decrease, rolling off as frequency increases. TTL  $V_{CC}$  (pin 11) would best be connected to the TTL logic devices positive supply, while ECL  $V_{CC}$  is recommended to be isolated to a separate PECL logic plane, if possible.  $V_{EE}$ , pin 8, may be connected to the common ground plane.

An open, floating TTL input (pins 7, 8, 9, 12, 14) will drift to near  $V_{CC}$  and considerations must be taken to reduce noise injected into the device under this condition, such as connecting unused inputs to  $V_{CC}$ . The Common Strobe pin is TTL type input.

Output to output skew is 150 pS worst case (at +70°C). Device to Device slew is less than 300 pS skew. Jitter is 40 to 60 pS.

### MC10H606 / MC100H606 as TTL to PECL

This device offers translation and registration (re-clocking) of TTL signals to PECL. Special advantages may be realized with this device, consult the device data sheets for specific features.

### MC10ELT20 / MC100ELT20 and MC10ELT22 / MC100ELT22 as TTL to PECL

These devices do not sport any internal input resistor network to force a default level on an open floating pin. An open, floating TTL input (pins 7, 8, 9, 12, 14) will drift to near  $V_{CC}$  and considerations must be taken to reduce noise injected into the device under this condition, such as connecting unused inputs to  $V_{CC}$ .

Higher operating frequency range will be affected by input swing; a higher input swing will allow a higher operating range.

## From TTL to LVPECL

Translation from TTL to LVPECL requires a two-stage process: first TTL to PECL (with a 5 V supply) second PECL to LVPECL. The first may be accomplished per the segment above on TTL to PECL. The second stage is done with MC100LVEL92 (see also PECL to LVPECL segment).

Under the condition where the TTL signal is confined to not exceed 3.3 V, a MC10EPT20 / MC100EPT20, MC10EPT22 / MC100EPT22, or MC100LVELT22 may be used. The MC100LVELT22 has operation frequency band range from <1 Hz (with sufficiently sharp edges) to 600 MHz. Diode clamping may be used to prevent input signals from exceeding 3.3  $V_{CC}$ .

## From TTL to LVNECL

Translation from TTL to LVNECL is done in two stages:

1. Use TTL to PECL (ELT20 or ELT22)

2. Then use PECL to LVNECL Translation (LVEL91).

Both are described above. Alternatively, the first translation may be TTL to LVPECL and the second translation would then be LVPECL to LVNECL Translation, still using the LVEL91.

If a -5 V supply is available, signals may be translated to NECL (see next segment) then ported to any LVNECL input.

## From TTL to NECL

Several devices are available to accomplish TTL to NECL translation in a single package: the -H424, -H124, and the ELT24. Alternatively, translation from TTL to NECL could be done in two stages: first TTL to PECL (ELT20 or ELT22), second by passing through a PECL to NECL Translation (EL91). The NECL or LVNECL output levels could then be ported to any NECL or LVNECL receiver, since the levels are the same. No power supply sequencing is needed, but all supply connections are required for proper operation.

### H424 as TTL to NECL

An “open”, floating TTL input will drift to near  $V_{CC}$  and considerations and may inject noise into the device under this condition. It is recommended to tie any unused TTL input to  $V_{CC}$ .

### H124 as TTL to NECL

Although no supply sequencing is required, if the  $V_{EE}$  and GND are powered up prior to the  $V_{CC}$  connected, about 5 to 10 mA may be drawn from a “off”  $V_{CC}$  supply. This could draw the off  $V_{CC}$  supply to -0.25 V, depending in the internal “off” impedance.

### H600 as TTL to NECL

This device boasts a 9 bit wide capability with a bandwidth from <1 Hz (with sufficiently sharp edges) to 250 MHz. The ECL Enable input has an internal 50 k $\Omega$  pulldown resistor to force an input default (LOW) state when floating open. When both the TTL and ECL Enable pins are forced LOW, the outputs will default to LOW.

### H602 as TTL to NECL

This device has similarities to the -H600 with pulldown resistors on the ENECL, LEN, and MR inputs.

### ELT24 as TTL to NECL

Use the MC100EPT24D with a  $V_{EE}$  “stand-off” resistor of about 61 ohms to drop the 1.7 V difference between  $V_{EE}$  of LVPECL and PECL (mean  $I_{EE}$  = 28 mA,  $\sigma$  = 0.2 mA). This reduces the operating voltage across the device from 5.0 V  $V_{EE}$  supply to 3.3 V.

This device does not have an internal input resistor network to force a default level on an open, floating input pin. If floated open, the TTL input, pin 2, will drift to near  $V_{CC}$  and may inject noise into the device. A 10 k $\Omega$  pull-up resistor may be connected from pin 2 to  $V_{CC}$  forcing a default state (Q HIGH) under open or floating input conditions.

**From LVTTL/LVCMOS to PECL**

Translation from LVTTL to PECL may be done in a single device such as the H351, H606, ELT20, ELT22, or through half of the ELT28.

For higher frequency operation, translation is done in two stages:

1. LVTTL to LVPECL using EPT20, EPT22, LVELT22, or EPT24
2. LVPECL signals into any PECL line receiver with a  $V_{IHCMRmin}$  able to recognize a LVPECL HIGH level (such as EL17, EL14, EL13, etc.).

**From LVTTL/LVCMOS to LVPECL**

Use EPT20, EPT22, or LVELT22 to translate from LVTTL/LVCMOS to LVPECL

**From LVTTL to LVNECL**

Use the MC100EPT24D

**From LVTTL to NECL**

Translation from LVTTL/LVCMOS to NECL is done in two stages:

1. Use LVTTL/LVCMOS to LVPECL (EPT20, EPT22, LVELT22)
2. Then use LVPECL to NECL (EL91).

**From CMOS to PECL**

The MC10H352 offers inputs with proper CMOS detect levels for translating 5.0 V CMOS signals to PECL levels.


Non CMOS detect level devices may be used such as ELT20, ELT22, and ELT28 for expended frequency range with some small loss in duty cycle.

**From CMOS to LVPECL**

Translation from CMOS to LVPECL is done in two stages:

1. CMOS to PECL using a MC10H352 (or similar)
2. Then use a PECL to LVPECL translator, MC100LVEL92.

GigaComm is a trademark of Semiconductor Components Industries, LLC.

**ON Semiconductor** and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

**PUBLICATION ORDERING INFORMATION****Literature Fulfillment:**

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** ONlit@hibbertco.com

**N. American Technical Support:** 800-282-9855 Toll Free USA/Canada

**From CMOS to LVNECL**

Translation from CMOS to LVNECL is done in two stages:

1. CMOS to PECL using a MC10H352 (or similar)
2. Then use PECL to LVNECL via MC100LVEL91.

**From CMOS to NECL**

Translation from CMOS to NECL is done in two stages:

1. CMOS to PECL using a MC10H352 (or similar);
2. Then use PECL to NECL translator, MC100EL91.

**JAPAN:** ON Semiconductor, Japan Customer Focus Center  
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051  
**Phone:** 81-3-5773-3850  
**Email:** r14525@onsemi.com

**ON Semiconductor Website:** <http://onsemi.com>

For additional information, please contact your local Sales Representative.