BOARD VIEWED ON 'A' FACE

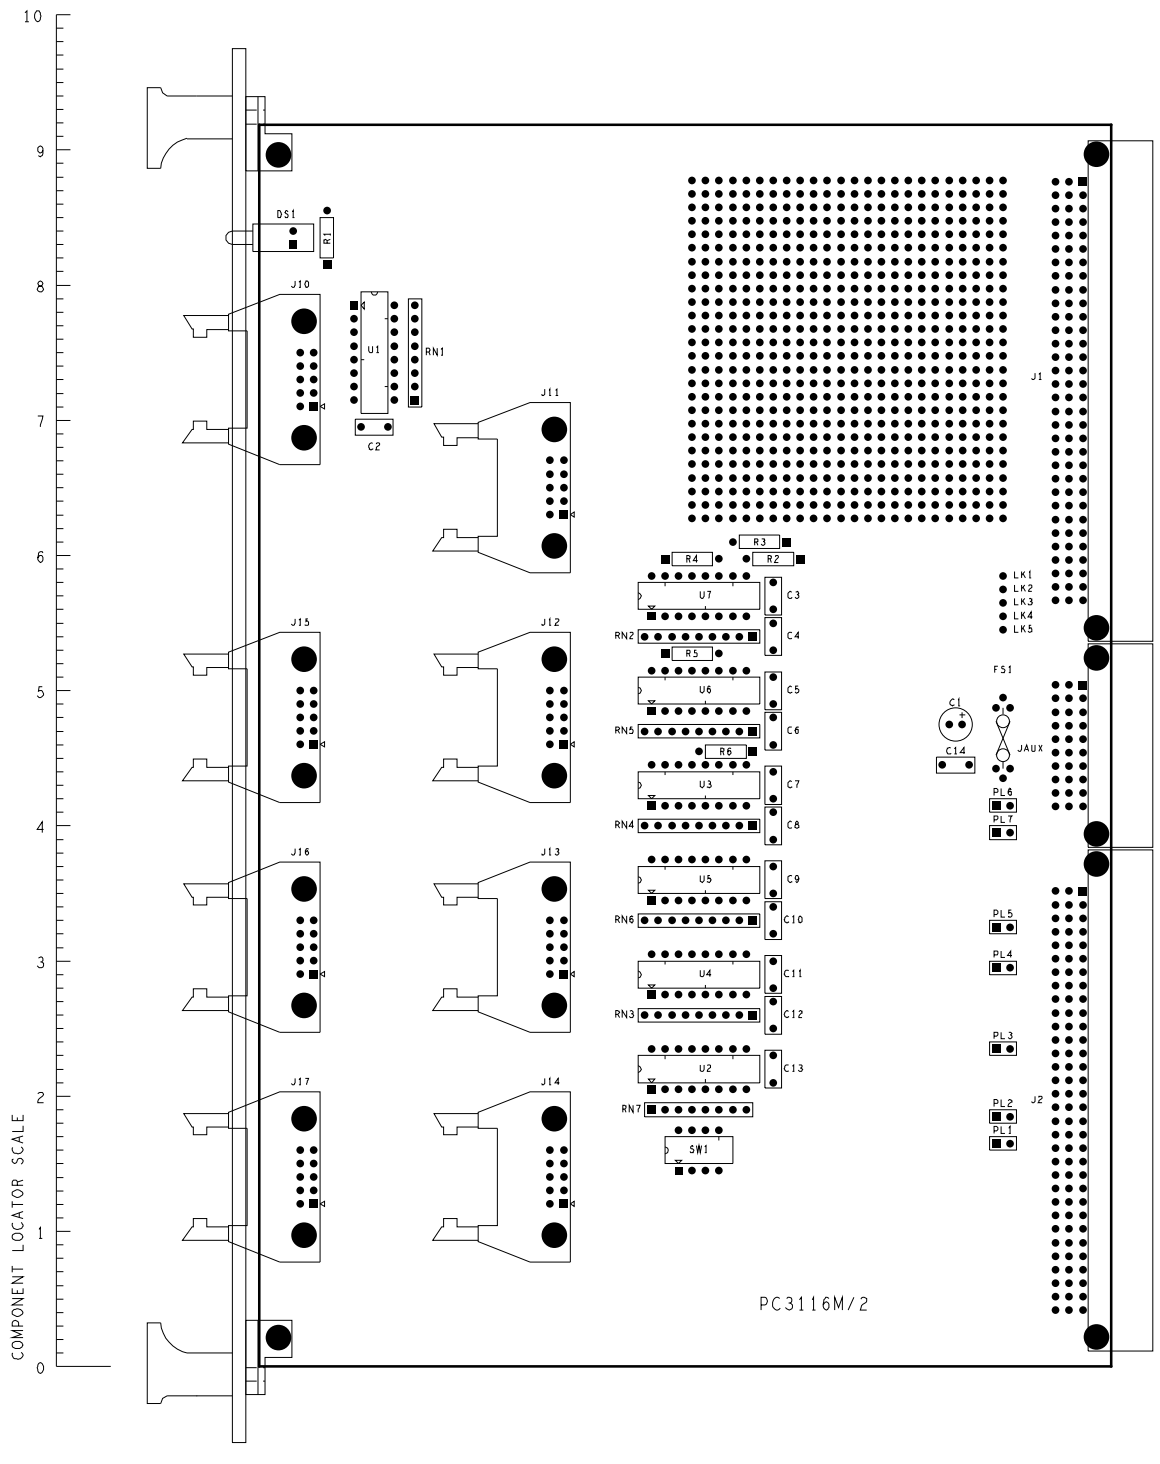

ASSEMBLY NOTES

1 - ENSURE CORRECT ORIENTATION OF COMPONENTS.

2 - VME CONNECTORS J1 AND J2 ARE TO BE INSTALLED.
VME CONNECTOR JAUX IS NOT TO BE INSTALLED.

3 - ALL ICs (U1-U7)TO BE MOUNTED IN LOW-PROFILE SOCKETS AS SPECIFIED IN KITTING LIST.

4 - ALL RESISTOR NETWORKS ARE TO BE MOUNTED IN SIL SOCKET STRIPS AS SPECIFIED IN KITTING LIST.

5 - MOUNT FUSE FS1 WITH 2 FUSE HEADERS AS SPECIFIED IN KITTING LIST.

ISSUE	DATE	MOD NO.	DRAWN	CHECKED	APPROVED	STATUS
B	09-03-1999	TE176	D.J.BECKETT	D.J.BALLARD	M.POSTRANECKY	
A	19-03-1998	-----	D.J.BECKETT	D.J.BALLARD	M.POSTRANECKY	

TOLERANCE UNLESS STATED

FINISH: REMOVE ANY BURRS

ORIGINAL SCALE 1:1

DO NOT SCALE

MATERIAL & SPEC

SURFACE TEXTURE micro m ✓ UNLESS STATED

0 50mm

USED ON

© CCLRC 1998

CCLRC
COUNCIL FOR THE CENTRAL LABORATORY OF THE RESEARCH COUNCILS
RUTHERFORD APPLETON LABORATORY, CHILTON, OXON. OX11 0QX

TITLE

PC3116M ASSEMBLY

CLOAC II FANOUT MODULE

A | 2-TE-0095-007-00-B

TOTAL NO OF SHEETS 1

A | 2-TE-0095-007-00-B